


## Hidrotubo

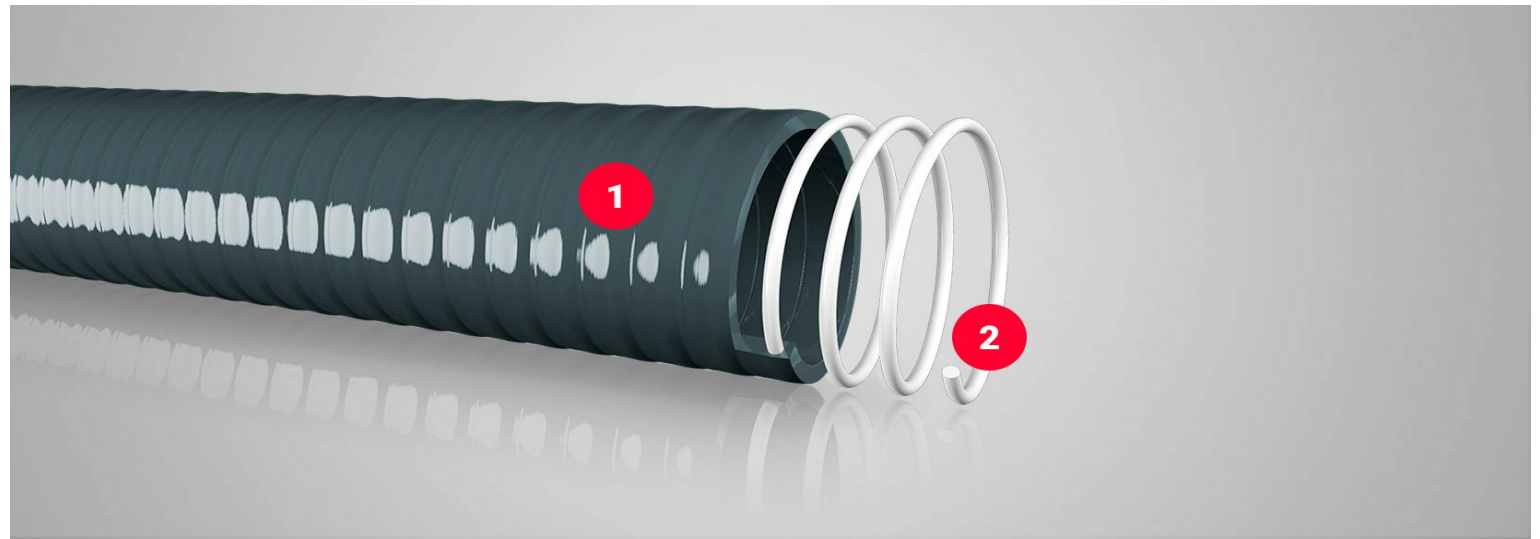

Tube made by co-extrusion of vinyl compounds in compliance with UNE EN ISO 3994 standard

### Description

Non-toxic

Smooth inner and outer surface. Very light and flexible

Outer diameters adjusted for easy assembly on PVC and PE couplings

Resistant and water-tight fixing to couplings at a pressure of 30 bar

Withstands temperatures from -10°C and +60°C

Tube with high chemical resistance, due to the use of PVC

High resistance to sewage and chlorinated swimming pool water

Tube with MARCA N AENOR Product Certificate complying with UNE EN ISO 3994

### Applications

Discharge pipes, plumbing pipes, pool purification systems, hot tubs, drains, condensation and air conditioning systems

### Covers

1 Flexible PVC, completely smooth inner and outer surface

2 Inner spiral rigid shock-resistant PVC reinforcement that gives it great strength

### Characteristics



Uso piscinas



Construcción



Alto control de calidad



Libre de Cd/Pb/Ba

### Technical data

Ø int    Ø ext    Weight    Service Pressure    Minimum bursting pressure    Bending radius    Vacuum m

(mm)	(mm)	(gr/m)	(bar)	(bar)	(mm)	H <sub>2</sub> O
13	16	100	7	22	39	7
16	20	155	7	22	48	7
20	25	240	7	22	60	7
25	32	400	7	22	75	7
26	32	370	5	15	78	7
27	32	334	5	15	81	7
34	40	480	5	15	102	7
35	40	400	5	15	105	7
42	50	710	5	15	126	7
43	49	550	5	15	129	7
43	50	685	5	15	129	7
55	63	1000	5	15	165	7
65	75	1400	4	12	195	7
80	90	1800	4	12	240	7
100	110	2200	3	9	300	7
110	125	3700	3	9	330	7