

TECHNICAL DATASHEET





EF TEE 90°

00 Update - 09/2015

TECHNICAL DATA

| | |
|-----------------------|-------------------|
| Article No | 001 117 2041 0160 |
| d (mm) | 160 |
| D (mm) | 195 |
| Z (mm) | 320 |
| le1 (mm) | 86 |
| le2 (mm) | 98 |
| Weight (Kg) | 3,34 |
| Box Quantity (pcs) | 2 |
| Box Dimension (cm) | 35x45x35 |


INJECTION MOULDED

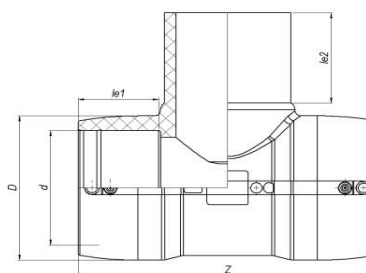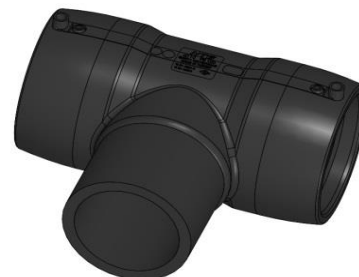

IDENTIFICATION OF PRODUCT

| | |
|----------------|--|
| D(mm) | 160 |
| SDR | 11 |
| RAW MATERIAL | PE 100 |
| PRESSURE CLASS | 16 Bar Water 10 Bar Gas |
| TRADEMARK | NTG |
| EXECUTION | Injection Moulded |
| STANDARD | EN 12201-3 EN 1555-3 AS / NZS 4129 |
| SPECIFICATION | Suitable for SDR11....17 pipe 4 mm pin connectors |

EF SPECIFICATION

| | |
|-----------------|---|
| WELDING VOLTAGE | 40V |
| RESISTANCE | 0,91 Ω |
| WELDING TIME | 360 Sec |
| COOLING TIME | 20 Min |
| WINDING TYPE | Monofilar |
| WELDING BARCODE |  |

971420321603400916360111

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.