
TECHNICAL DATASHEET



EF TEE 90°


01 Update - 11/2016

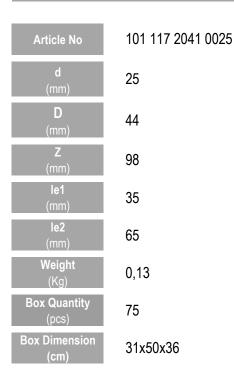

TECHNICAL DATA

INJECTION MOULDED





IDENTIFICATION OF PRODUCT

D(mm)	25
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3
	EN 1555-3
	AS / NZS 4129
SPECIFICATION	Suitable for SDR11 pipe
	4 mm pin connectors

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	4.30 Ω
WELDING TIME	35 Sec
COOLING TIME	3 Min
WINDING TYPE	Monofilar
WELDING BARCODE	970621010253994305035114

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance \pm 5%. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.