

### Brunndæla 750w:

Vörunúmer: CSP-750P

- Hámarks kornastærð =5mm
- Max hæð 8,2 m
- Max flæði 210 l/min
- Max hitastig 40°C

Verð: 19.245.kr m/vsk


### Brunndæla 900w

Vörunúmer: CSP-900PW

- Hámarks kornastærð =
- 35mm Max hæð 9,8 m
- Max flæði 250 l/min
- Max hitastig 40°C

Verð: 20.528.kr m/vsk

PERFORMANCE CHART AT n=2900 r/min

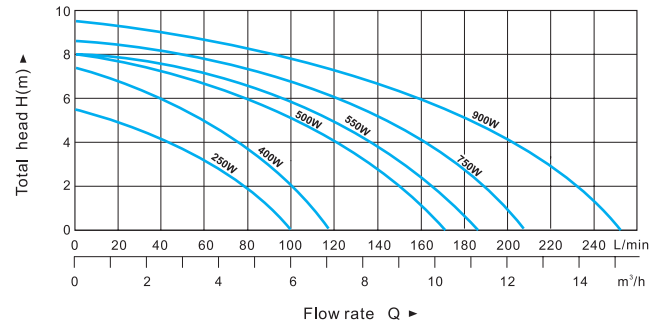

CSP-XX0P



CSP-XX1P

MODEL	POWER P1(W)	MAX.FLOW (L/min)	MAX.HEAD (m)	DIA.OF PIPE	CABLE	G.W (kg)	PACKING DIMENSION/UNIT (mm)	QTY/20' GP (UNIT)
CSP-250P / CSP-251P	250	100	5.5	1", 1¼", 1½"	H05RN-F3G0.75mm <sup>2</sup>	16	460x340x330/4pcs	2300
CSP-400P / CSP-401P	400	118	7.5		H05RN-F3G0.75mm <sup>2</sup>	17	460x340x330/4pcs	2300
CSP-500P / CSP-501P	500	168	8		H05RN-F3G0.75mm <sup>2</sup>	21	460x340x350/4pcs	2300
CSP-550P / CSP-551P	550	185	8		H05RN-F3G0.75mm <sup>2</sup>	21	460x340x350/4pcs	2040
CSP-750P / CSP-751P	750	210	8.5		H05RN-F3G1.0mm <sup>2</sup>	22	460x340x350/4pcs	2040
CSP-900P / CSP-901P	900	250	9.5		H05RN-F3G1.0mm <sup>2</sup>	24	460x340x350/4pcs	2040