




DRZ BRASS FORGED MANIFOLDS WITH MALE OUTLETS


TECHNICAL FEATURES

MAX WORKING TEMPERATURE	100°C (212°F)
MAX WORKING PRESSURE	10 BAR
THREADS	ISO 228
BODY	BRASS CW617N

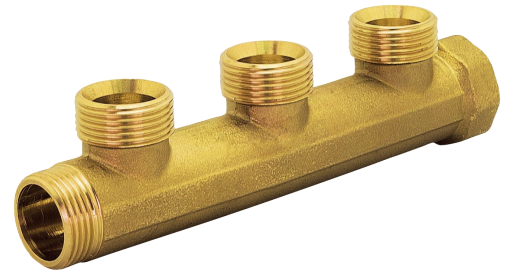

OVERALL DIMENSIONS

CODE	ØD1	ØD	I	L
202E	3/4"	3/4"	50	108
		1"		109
203E	3/4"	3/4"	50	158
		1"		159

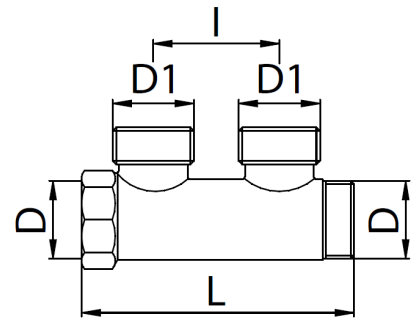

FLUID CHARACTERISTICS

IN ORDER TO GRANT PRODUCT WARRANTY, THE QUALITY OF THE WATER CONTAINED IN THE SYSTEM HAS TO BE IN CONFORMITY WITH THE RULES IN FORCE IN THE COUNTRY OF RELEVANCE OR AT LEAST TO PRESENT FEATURES NOT LESS THAN THOSE PRESCRIBED BY ITALIAN NORM UNI 8065:2019.

AS GENERAL MINIMUM INDICATIONS, AT LEAST THE FOLLOWING PARAMETERS HAVE TO BE RESPECTED:

ASPECT:	LIMPID
PH:	> 7 & < 8,5
IRON (FE):	< 0,5 MG/KG
COPPER (CU):	< 0,1 MG/KG
ANTIFREEZE (*):	PASSIVATED PROPYLENE GLYCOL
CONDITIONING (*):	IN THE RESPECT OF THE CONCENTRATIONS INDICATED BY THE PRODUCER

(* ANYWAY, IN CASE OF USE OF ADDITIVES OR CONDITIONING SUBSTANCES, YOU WILL HAVE TO PREVENTIVELY VERIFY THE COMPATIBILITY OF THE SUBSTANCES YOU INTEND TO USE WITH RESPECT TO THE CONSTRUCTION MATERIALS STATED IN THIS TECHNICAL DOCUMENT FOR ALL OUR PRODUCTS.

