

TECHNICAL DATASHEET




EF REDUCER

02 Update - 12/2018

TECHNICAL DATA

Article No	101 117 2080 0052
d1 (mm)	50
d2 (mm)	32
D1 (mm)	62
D2 (mm)	44
le1 (mm)	46
le2 (mm)	40
Z (mm)	91
Weight (Kg)	0.087
Box Quantity (pcs)	80
Box Dimension (cm)	29x48x22

INJECTION MOULDED

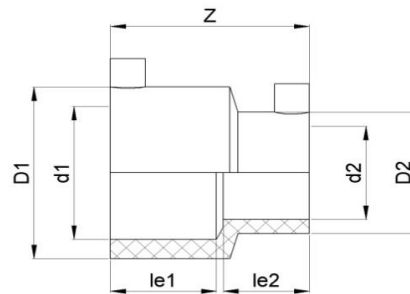

IDENTIFICATION OF PRODUCT

D(mm)	50-32
SDR	11
RAW MATERIAL	PE 100
PRESSURE CLASS	16 Bar Water 10 Bar Gas
TRADEMARK	NTG
EXECUTION	Injection Moulded
STANDARD	EN 12201-3 EN 1555-3 AS / NZS 4129
SPECIFICATION	Suitable for SDR11 pipe 4 mm pin connectors

EF SPECIFICATION

WELDING VOLTAGE	40V
RESISTANCE	2.16 Ω
WELDING TIME	60 Sec
COOLING TIME	5 Min
WINDING TYPE	Monofilar
WELDING BARCODE	



931420301263992165060116

Tolerance on diameters and thickness according to the standards. The other dimensions are specialized. Tolerance $\pm 5\%$. NTG PLASTIK reserves all the right to change any information without giving prior notice. The production, distribution and utilization of this document without explicit authorization is prohibited.